


INSTALLATION Connections: Cinema Processor

CINEMA PROCESSOR CONNECTION

Audio signals are input to the DCM via the FROM PROCESSOR OUTPUT connection. This DB25-type connection conforms to cinema industry standard pinout. Most common cinema processors use this DB25 connection standard, making connection to the DCM simple. Orient the DB25-type connector properly, push gently to seat the pins, then finger-tighten the retaining screws.

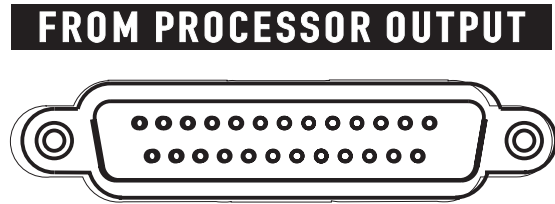

Cinema processors that do not use standard DB25-type connection typically have adapter cables available. Check with the processor manufacturer. We recommended that you purchase a standard 25-pin cable from any of the well known cinema industry cable suppliers.

FROM PROCESSOR OUT Pinout

Configuration: 25-pin SubD male to 25-pin SubD male.

Pin #	Signal Description
1	Chassis Ground
2	Left +
3	Left Center -
4	Chassis Ground
5	Center +
6	Right Center -
7	Chassis Ground
8	Right +
9	Chassis Ground
10	Surround Left -
11	Surround Right -
12	Subwoofer -
13	Chassis Ground
14	Left -
15	Chassis Ground
16	Left Center +
17	Center -
18	Chassis Ground
19	Right Center +
20	Right -
21	(not used)
22	Chassis Ground
23	Surround Left +
24	Surround Right +
25	Subwoofer +

